



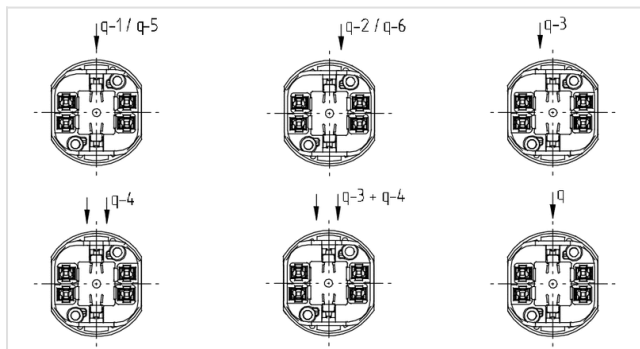


Technik für Licht
Komponenten · Optik · Automation

26.745.1371

Compact Fluorescent Lampholders
G24 / GX24

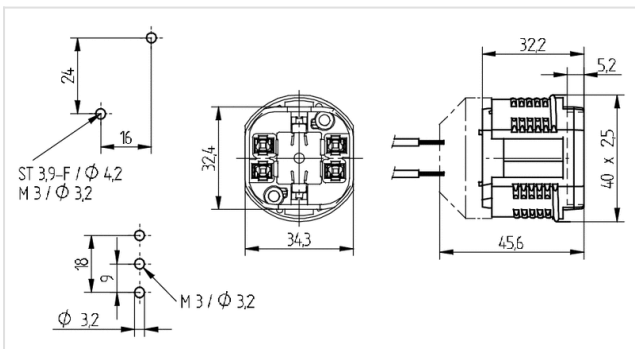

Farbe: weiß
FC: 50
Part no.: 26.745.1371.50



Description

- Threaded barrel
-
- Screw mount vertical, diagonal: two holes \varnothing 3.2 mm
-
- Panel cut-out: 2 holes, distance 16 x 24 for self-tapping screws ISO 1481 - ST 3.9 - F
-
- Screw mount central, vertical: one hole \varnothing 3.2 mm and 2 anti rotation slots
-
- Panel cut-out: three holes 2 x 9 = 18 mm for screws ISO 1207 - M3
-
- Rivet mount: we recommend blind rivet \varnothing 3.0 mm according to DIN 7337 (Aluminium / Steel flat round head) max. pull force 500 N

Short description:	For lamps TC-DEL, TC-TEL
Product name:	Lampholder G24/GX24
LED type:	GX24
Symbol :	140
Color:	white
Mounting method 1:	Screw mount
Material:	Housing: PBT
cULus file no.:	E-92235
Weight:	15
Approval:	additional cULus
Key:	q-3 (26 / 32 Watt)
T-Marking:	140
Pkg.:	250