


LED - Lighting and connection technology

Receptacle 47.121.U301.80 for communication and sensor units for O ring seal and standardised metal sheet cut-out

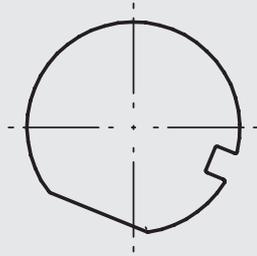


Electromechanical interface for outdoor luminaires according to  Zhaga Book 18 to accommodate communication and sensor units

Receptacle 47.121.U301.80 for standardised metal sheet cut-out
4 pole

Area of application:
Street and area lighting (parking areas and footpaths)
outdoor lighting
wall lights

- IP-compliant connector and cap
- Compact design for flexible mounting position in luminaire housing
- Approved and certified according to VDE DIN EN 61984

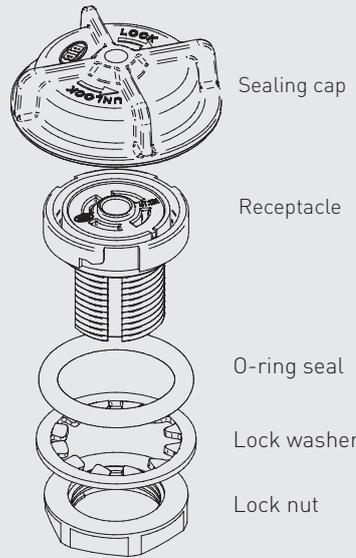

Modular system

Sealing cap: 47.121.-303.xx
Material: PBT


Receptacle: 47.121.U301.80
4 pole
Material: Contacts: CuSn
Housing: PBT / PC

O ring seal: 47.121.-705.84
Material: MVQ (Silicone)

Lock washer M20: 47.121.-702.14
Material: steel zinc plated

Lock nut M20x1.5 mm: 47.121.-305.80
Material: PA

Assembly dimensions and cut-out

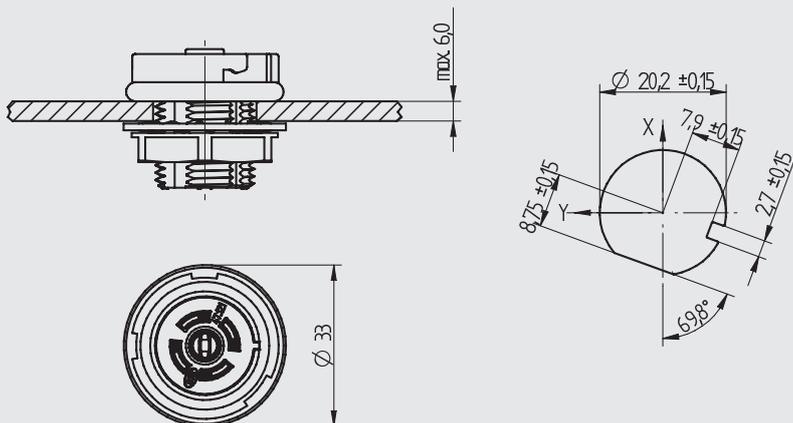


Temperature data	
Temperature range	-40 °C up to 100°C
Mechanical data	
Protection class	IP 66
Thread	M20 x 1.5 mm
Thread length	18.5 mm
IK-Impact strength grade	IK09
Height above luminaire	10 mm
Luminaire housing thickness	max. 6 mm
Tightening torque of the locknut	2.5 Nm
Electrical data	
Rated current	2 A
Rated voltage	24 V DC
Flexible tinned wire	0.5 - 1.5 mm ²
Solid wire	0.5 - 1.5 mm ²
Strip length	8 - 10.5 mm
Insulation diameter	max. 3 mm
Lead	16 - 20 AWG

LED - Lighting and connection technology



47.121

Receptacle 47.121.U301.80 for communication and sensor units for O ring seal and standardised metal sheet cut-out

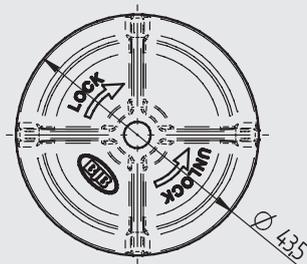


pkg.	wt.	part no.
200	7.8 g	47.121.-303.80 black
200	7.8 g	47.121.-303.90 dark gray
200	7.8 g	47.121.-303.93 anthracite

Sealing cap
Material: PBT

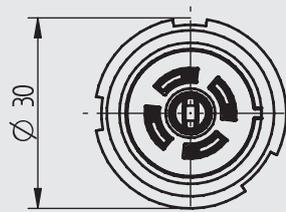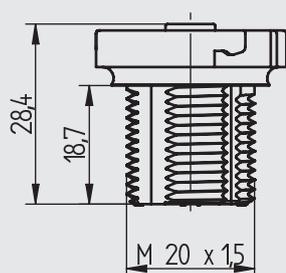

pkg.	wt.	part no.
200	9.6 g	47.121.U301.80

Receptacle
4 pole
Material: Contacts: CuSn
Housing: PBT / PC
Contact rating: 2 A, 24 V
Hot pluggable
Wires: for rigid and flexible, tinned wire ends 0.5 - 1.5 mm², 16 - 20 AWG
Strip length: 8 - 10.5 mm
Insulation diameter: max. 3 mm

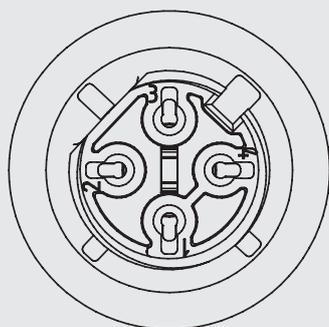


Marking wire entry	Function
1	+24 V Power supply
2	Negative pole for [DALI] protocol Ground for +24 V power supply (contact 1) Ground for General Digital I/O (contact 4)
3	Positive pole for [DALI] protokol
4	General Digital I/O (> 7V)

-40°C
+100°C

LED - Lighting and connection technology


47.121

Receptacle **47.121.U301.80** for communication and sensor units
for O ring seal and standardised metal sheet cut-out

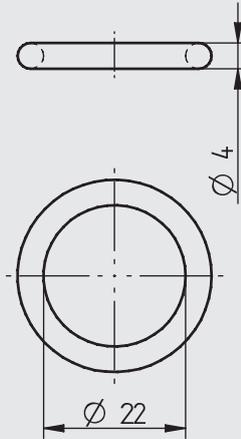


pkg.	wt.	part no.
200	7.8 g	47.121.-705.84

O ring seal
Material: MVQ (Silicone)

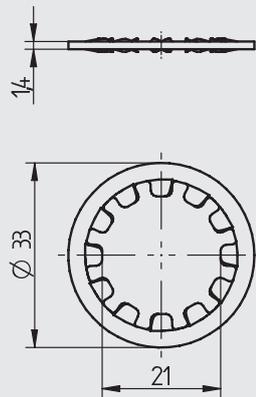

pkg.	wt.	part no.
200	4.2 g	47.121.-702.14

Lock washer M20
Material: steel zinc plated

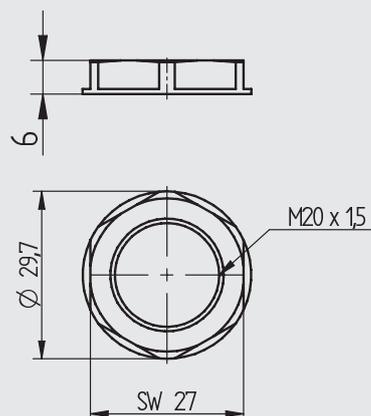

pkg.	wt.	part no.
200	2.5 g	47.121.-305.80

Lock nut M20x1.5 mm
Material: PA