
## OptiSpot Lens Ø 50 mm - Wide Flood

35.250 - Optispot Lens for use with COB connectors 47.360 Ø 35 mmm



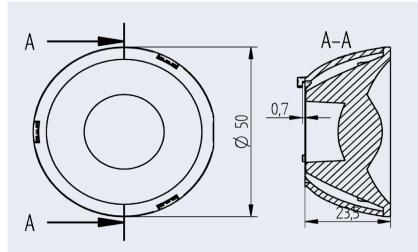

Part no. **35.250.**2004-0

OptiSpot Lens Ø 50 mm - Wide Flood

Bayonet fixing by Twist & Lock action


Light distribution: Wide Flood

OptiSpot Lens is optimized for use with connectors 47.360 with Ø 35 mm.\*

Specification		
Top diameter	50 mm	
Height	23,50 mm	
Material holder	PC	
Material lens	PMMA	
Max. temperature	80°C	
Weights	28,3 g	
Pkg.		

This product contains the following REACH SVHC substances. For further information please refer to www.bjb.com.

CAS-Number	EG-Number	Substance name
		2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-
3147-75-9	221-573-5	tetramethylbutyl)phenol

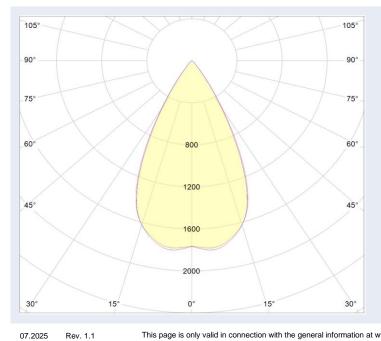

Rev. 1.1

Photometric data		
Beam angle (FWHM)*	50°	
Efficiency*	85%	
Measured with COB Type	Citizen CLU02J	
Measured with COB-holder	47.360.1020-0	

\*Light distribution, beam angle and efficiency are dependent on the COB in use and its LES.