
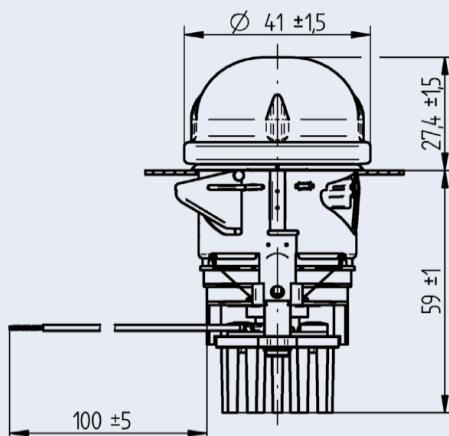


# Hot - LED Oven lamp

77.110 - LED Oven lamp



Part no.  
77.110.1001-0

## LED oven lamp

with thermal management by AIRPASS technology

Symmetrical light characteristic

Push in fixing into standard cutouts Ø 35.5 mm


Material thickness: 0.6 - 2.5 mm

- Variable LED parameters (CCT, CRI, number) are possible
- Protection class III due to operation on SELV voltage
- Max. possible current of the lamp is to be determined in the most unfavorable operating condition
- The choice of our products, as well as the technically correct installation according to the relevant regulations (e.g. IEC 62031 and IEC60335), are the sole responsibility of the user.

Special versions with higher requirements such as steam tightness, with microwave shielding or pyrolysis suitability on request

Photometric data	
Number of LEDs	1
Luminous flux @ Ta25° C @ If typical	190
Colour temperature	3500 K
Colour Rendering Index CRI	> 80
Temperature data	
Max. temperature @ Tc point of heat sink	110° C
Electrical data	
Operating mode	Constant current
Operating current If	1000 mA
Output	3.0 W
Dimmable	yes, with suitable ballast
Materials data	
Heat sink	Aluminium
Sleeve	CrNi
Housing	PET
Wires	black: PVC 0.35 mm <sup>2</sup> , 100 mm red: PVC 0.35 mm <sup>2</sup> , 100 mm
Protective glass with screw thread	Soda-lime glass
Weight	60 g
Commercial data	
Packaging quantity	20
Average life span (L70 / B50)	5.000 h (according to BJB test requirements)

## Installation position

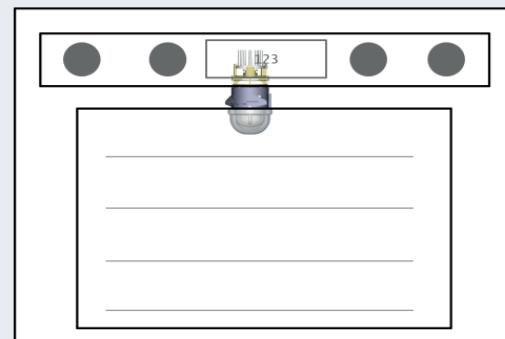

Tolerances of optical and electrical data: ±10 %.

## EOS/ESD safety guidelines

Some components of the BJB /// OEM – Line Modular System might be harmed by electrostatic discharge (ESD) and electrical overstress (EOS) and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken.

Modules where no contact to the LED module is possible do not need special measures for protection of electrostatic discharge (ESD).

## Assembly instructions

The LED module must not be exposed to tensile or compressive stresses.

## Note to chemical reactions

Chemical substances may harm the LED module. This could lead to reduced luminous flux, colour shift or total failure of the module caused by corrosion of electrical connections. Avoid corrosive atmosphere during usage and storage.

## Life span and lumen maintenance

The light output of an LED module decreases over the life-time, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the lifetime of an LED module. As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

## Thermal design, tc point, ambient temperature and life-time

The rated life of a LED module depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the LED module will be greatly reduced or the module may be destroyed.

The temperature at tc reference point is crucial for the light output and life-time of a LED module.

## Electrical supply

- The LED modules have no special protection against overvoltage, overcurrent, overload or short-circuit currents.
- To ensure reliable and safe operation a converter must be used which corresponds to the relevant regulations
- The BJB LED modules can be operated on SELV converters.
- The use of converters that provide constant current, permanent damage may occur.
- Wrong polarity may cause damage to the BJB LED components..