


# Rocker switches

43.409 1 pole screw mounting




technology for light

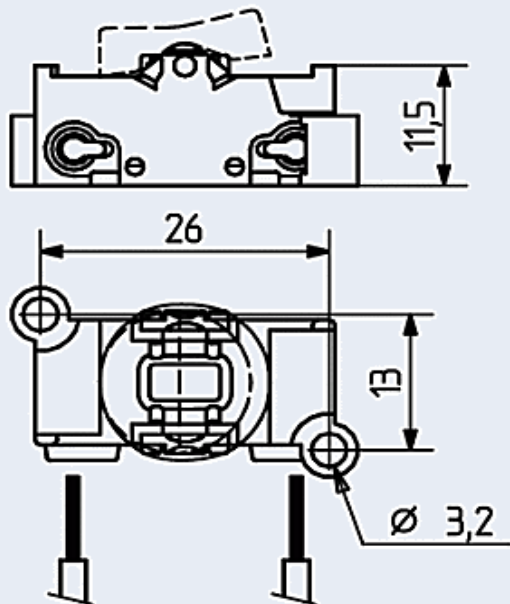

Part no.  
**43.409.U315-0**

- Screw mounting
- Contacts: silver/silver
- Protected against electric shock after insertion of conductor. Additional cover not required

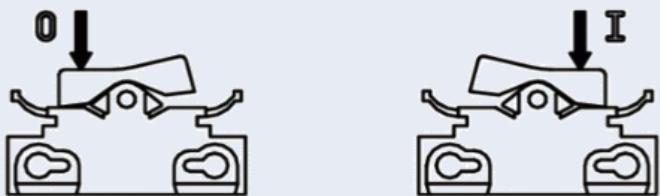

| Connection data            |                          |
|----------------------------|--------------------------|
| Connection technology      | Push wire contact        |
| Wire material              | Copper                   |
| Solid wires                | 0.5 - 1 mm², AWG 20 - 18 |
| Strip length 0.5 - 1.0 mm² | 7 mm / 0.28 inch         |
| Operating Cycles           | 10000                    |


| Electrical data      |                                |          |
|----------------------|--------------------------------|----------|
|                      | VDE / ENEC                     | cULus    |
| Ratings according to | EN IEC 61058-1<br>EN 61058-1-1 | UL 61058 |
| Rated voltage        | 250 V AC                       |          |
| Rated current        | 6 (2) A, 6 [32] A              |          |
| Rated temperature    | T 85/55                        |          |

| Material data               |                                                            |
|-----------------------------|------------------------------------------------------------|
| Material group              | III a                                                      |
| Insulation material         | Polycarbonate, white (housing)<br>Polyamid, white (rocker) |
| Flammability class per UL94 | V-2                                                        |
| Glow wire test              | 850°C                                                      |
| Contact material            | CuSn alloy                                                 |
| Degree of protection        | IP20                                                       |

| Packaging data |                      |
|----------------|----------------------|
| Product weight | 2.9 g                |
| Packaging I    | 1000 pcs. in polybag |
| Bag weight     | 2.96 kg              |

## Cut-out dimensions for metal sheet

- Panel thickness: 0.5 - 1.0 mm

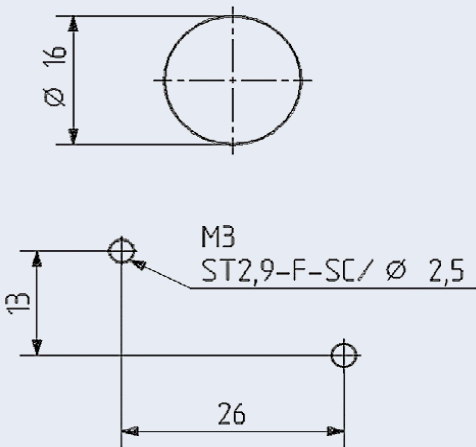


# Rocker switches

43.409 1 pole screw mounting



technology for light


## Accessories

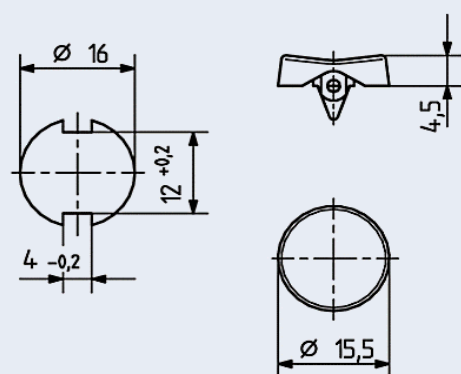

### Round rocker 43.409.E007-x

Available in the colours

- white (-0)
- black (-4)
- silver grey RAL 9006 (-1)
- grey (-5)

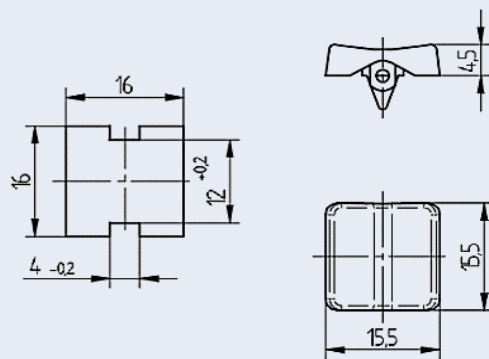


### Square rocker 43.409.E008-x

Available in the colours

- white (-0)
- grey (-4)


## Accessories

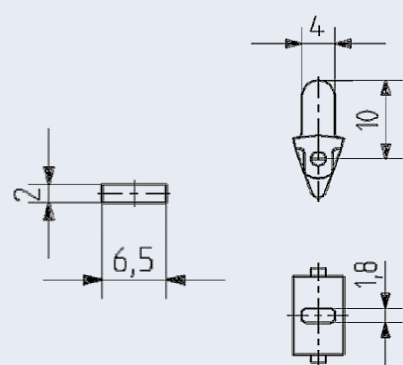

### Toggle switch 43.409.E009-0

Available in the colours


- white (-0)

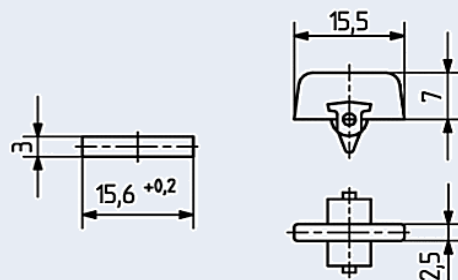

### Ribbed rocker 15.5 mm 43.409.E010-x

Available in the colours

- white (-0)
- black (-1)

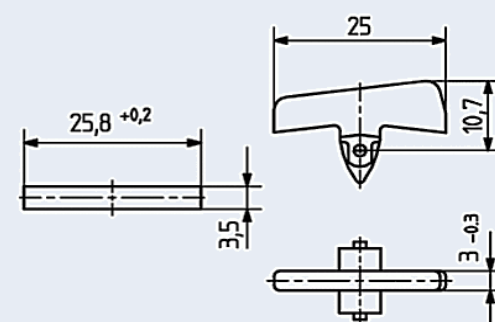

### Ribbed rocker 25 mm 43.409.E314-x

Available in the colours

- white (-0)
- black (-3)