


OptiSpot Lens Ø 35 mm - Flood

35.235 - OptiSpot Lens for use with COB connectors 47.360 Ø 35 mm

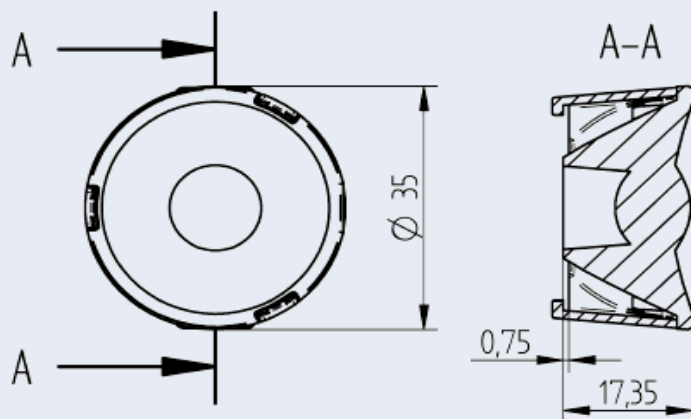

Part no.

35.235.2003-0

OptiSpot Lens Ø 35 mm - Flood

Bayonet fixing by Twist & Lock action

Light distribution: Flood


OptiSpot Lens is optimized for use with connectors
47.360 with Ø 35 mm.*

Specification

Top diameter	35 mm
Height	17,35 mm
Material holder	PC
Material lens	PMMA
Max. temperature	80°C
Weights	9,9 g
Pkg.	576 pcs

This product contains the following REACH SVHC substances.
For further information please refer to www.bjb.com.

CAS-Number	EG-Number	Substance name
3147-75-9	221-573-5	2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol

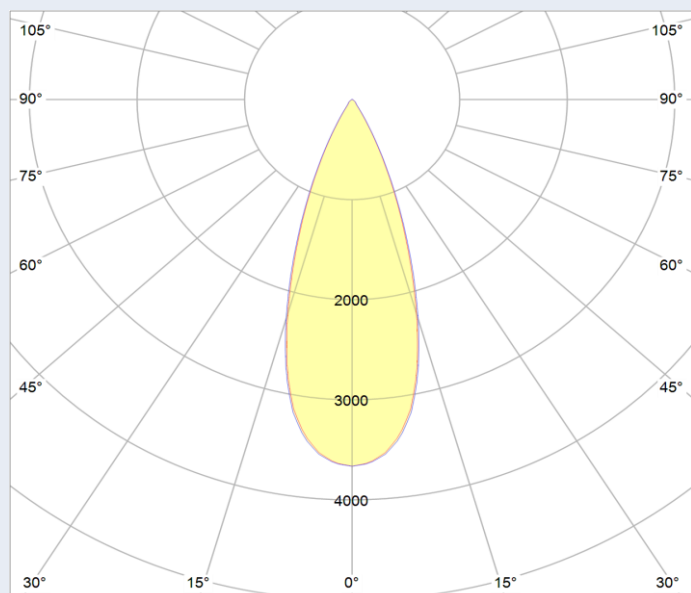

Photometric data

Beam angle (FWHM)*	35°
Efficiency*	89%
Measured with COB Type	Luminus CHM-6
Measured with COB-holder	47.360.1020-0

*Light distribution, beam angle and efficiency are dependent on the COB in use and its LES.