

pkg. wt. part no.
200 5 g **47.342.2003.50**

Connector


Housing: PBT

Contacts: CuSn

Wires: Cu, tinned, 0.35 mm² (22 AWG), Insulation: PVC red / black, Length: 500 mm, with ferrule

- Thickness: 1.6 ±0.14 mm
- Polarity protection
- Connection removable
- Other versions on request

T 100	2A 60VDC	CAD	i 100...
-------	-------------	-----	-------------

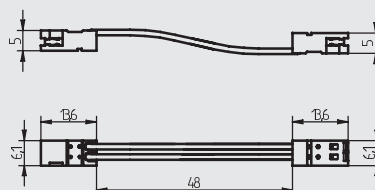

pkg. wt. part no.
200 3 g **47.342.3001.50**

Connector


Housing: PBT

Contacts: CuSn

Wires: Cu, tinned, 0.35 mm² (22 AWG), Insulation: PVC white / white, Length: 48 mm

- Thickness: 1.6 ±0.14 mm
- Polarity protection
- Connection removable
- Other versions on request

T 100	2A 60VDC	CAD	i 100...
-------	-------------	-----	-------------



pkg. wt. part no.
500 2 g **47.302.2001.50**

Connector

Housing: PBT

Contacts: CuSn

- Thickness: 1.6 ±0.14 mm
- Polarity protection
- Connection removable
- Other versions on request

T 100	2A 60VDC	CAD	i 100...
-------	-------------	-----	-------------