


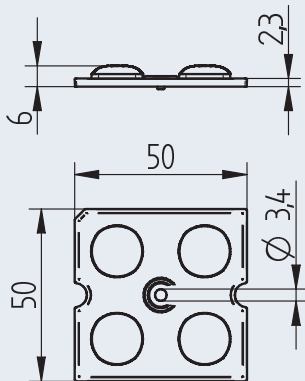

pkg.	wt.	part no.
120	8 g	35.104.1004-0

OptiSquare 2x2 - Extra wide
Optics for Highbay and area lighting
for use with LED modules according to Zhaga Book 15

Light distribution: Extra wide

Material: PMMA (clear)
Screw fixing: for screws M3
Maximum torque: 0.5 Nm


Suitable for Philips Fortimo FastFlex LED 2x6 / 740 DA HE and LED modules with 25.4 mm pitch distance according to Zhaga Book 15

- Typical application:**
- Car parks and parking area lighting
 - Perimeter of car parks and parking areas
 - Industrial lighting such as high-bay warehouses, packaging and shipping halls, production halls

Height	6 mm
Width	50 mm
Length	50 mm
Type of fixing	Screw fixing: (0.5 Nm) screws M3
LED Type	Philips Fortimo FastFlex LED 2x6 / 740 DA HE and LED modules with 25.4 mm pitch distance according to Zhaga Book 15
Pitch distance	25.4 mm
Material	PMMA
Colour	clear
Lense surface	High gloss
Permissible application temperature	-40 °C up to 80 °C*

The presented information are for reference only. All lighting parameters are typical values.
The light distribution depends on the used type of LEDs, position tolerance, chip size and used colour.

* 70°C, if ball pressure test according to EN 60598-1 section 13.2.1 is required for components that ensure protection against electric shock.

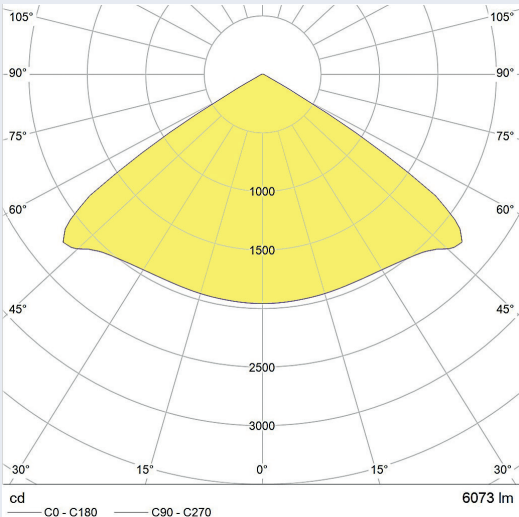

Light distribution: Extra wide
measured with Philips Fortimo FastFlex LED 2x6 / 740 DA HE
Efficiency: 97%