

pkg.	wt.	part no.
120	9.8 g	35.104.1001-0

OptiSquare 2x2 - IESNA Type 1
Optics for street and area lighting
for use with LED modules according to Zhaga Book 15

Light distribution: IESNA Type 1

Material: PMMA (clear)
Screw fixing: for screws M3
Maximum torque: 0.5 Nm


Suitable for Philips Fortimo FastFlex LED 2x6 / 740 DA HE
and LED modules with 25.4 mm pitch distance according to
Zhaga Book 15

- Typical application:**
- Walkways, paths and sidewalks
 - Entrance roadways
 - Loading and access ramps
 - General road and street lighting
 - Car parks and parking area lighting
 - Perimeter of parking areas
 - Center of roadways and intersections

Height	8.06 mm
Width	50 mm
Length	50 mm
Type of fixing	Screw fixing: (0.5 Nm) screws M3
LED Type	Philips Fortimo FastFlex LED 2x6 / 740 DA HE and LED modules with 25.4 mm pitch distance according to Zhaga Book 15
Pitch distance	25.4 mm
Material	PMMA
Colour	clear
Lense surface	High gloss
Permissible application temperature	-40 °C up to 80 °C*

The presented information are for reference only. All lighting parameters are typical values.
The light distribution depends on the used type of LEDs, position tolerance, chip size and used colour.

* 70°C, if ball pressure test according to EN 60598-1 section 13.2.1 is required for components that ensure protection against electric shock.

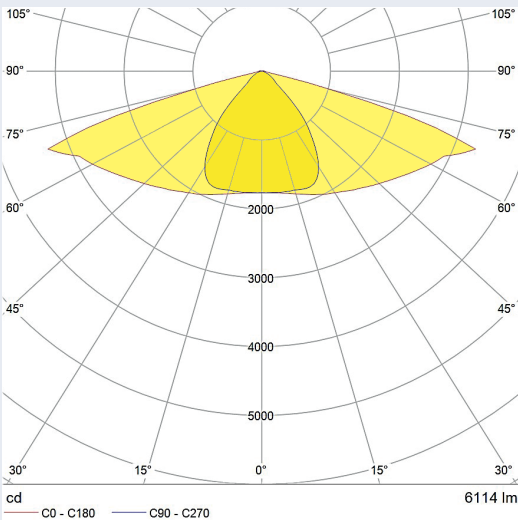

Light distribution: IESNA Type 1
measured with Philips Fortimo FastFlex LED 2x6 / 740 DA HE
Efficiency: 98%