OptiSpot R Lens Ø 34 mm

35.908 · OptiSpot R lens- Diffusor lens for use with reflectors 35.850

technology for light

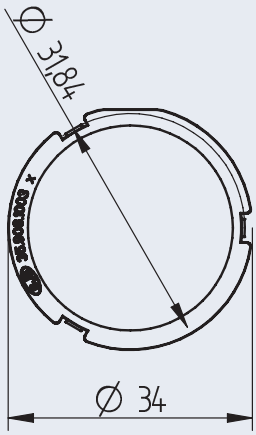



pkg.	wt.	part no.
30	2.4 g	**35.908.**1003.89

OptiSpot R lens - Diffusor lens

Fixing: snap into the bottom side of the reflector

Material: PMMA, clear, satined surface

For use with reflectors
35.850.1005 - 1008.56 with Ø 74 mm
35.850.1009 - 1012.56 with Ø 92 mm
35.850.1001 - 1004.56 with Ø 110 mm

The following product properties are achieved by combining a reflector with a diffusor lens:
- Soft transition of the color fringes
- Possibly visually disruptive openings of the connector are partly covered
- Visible reflector design

Additional properties:
- Dust proof
- Insect protection
- Contact protection (COB)

Please do not touch the reflector inside with bare fingers.

100°C CAD

Reflecor series 35.850.1005 - 1008.56

35.850.1005.56 Spot

35.850.1006.56 Medium

35.850.1007.56 Flood

35.850.1008.56 Wide Flood



Connector ø 50 mm

Effect on beam angle and efficiency of reflectors when combined with a diffusor lens (measured with COB Citizen CLU038 and COB connector **47.319**.2025.50). The values are for reference only.

Beam angle (FWHM) reflector	Efficiency reflector	Beam angle (FWHM) with diffusor lens **35.908.**1003.89	Efficiency with diffusor lens **35.908.**1003.89
35.850.1005.56 14.5°	89%	20°	88%
35.850.1006.56 22°	89%	28°	89%
35.850.1007.56 37°	90%	42°	89%
35.850.1008.56 58°	89%	62°	87%

This page is only valid in connection with the general information at www.bjb.com/en/General-Information-Products and further information of the specific product at www.bjb.com