NEW

OptiLine Square

4x4 Optics for Highbay and outdoor lighting

technology for light

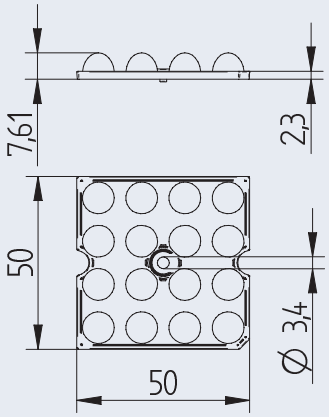

Optics for Highbay and outdoor lighting according to Zhaga Book 15

Light distribution: Spot

Material: PMMA (clear)
Screw fixing: for screws M3
Maximum torque: 0.5 Nm

Suitable for LED chips 3030, 2835 and LED modules with 4x4 Pitch according to Zhaga Book 15

pkg.	wt.	part no.
500	8.7 g	**35.116.**1006.85

Height	7.6 mm
Width	50 mm
Length	50 mm
Type of fixing	Screw fixing: (0.5 Nm) for screws M3
Type of LED	3030, 2835
Pitch distance	12.5 mm
Material	PMMA
Colour	clear
Lens surface	Highly polished
Optical efficiency	see below
Permissible application temperature	-40 °C up to + 80 °C

The presented information are for reference only. All lighting parameters are typical values. The light distribution depends on the used Type of LEDs, position tolerance, chip size and used colour.

-40°C
+80°C
CAD

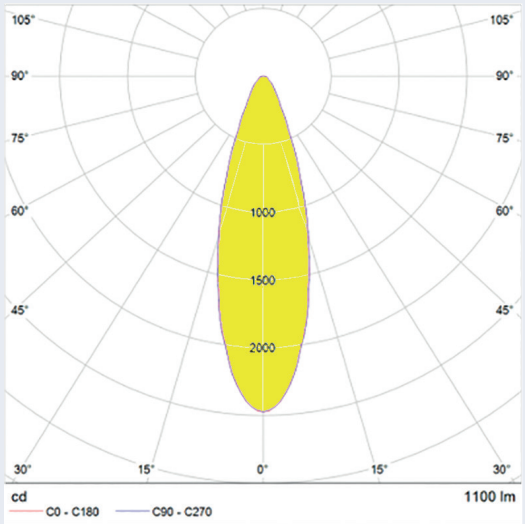

Light distribution: Spot
measured with Philips Fortimo FastFlex LED 4x16 DHE G4

Efficiency: 94%

This page is only valid in connection with the general information at www.bjb.com/en/General-Information-Products and further information of the specific product at www.bjb.com.