
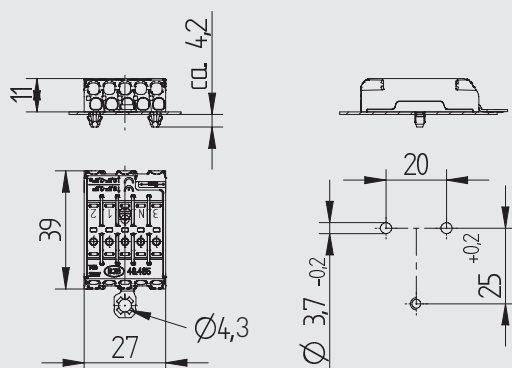


Flat terminal block

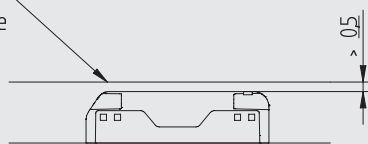

Minimum mounting distance

Metallfläche
Metal surfaceCompliance with creepage distances and clearances
has to be ensured by the structural design of the luminaire.

pkg. wt. part no.
500 12 g 46.485.1114-0

Flat terminal block
5 pole
Contact opening function

Earth bracket
Snap in pins
Housing: PA, beige, PC, white
Marking: 3 N ⊕ 1 2

- Upper terminal connection: 0.5 - 2.5 mm²
Direct insertion of solid wire ends and finely stranded wire ends by using the contact opening function Contact opening function - also for release of already inserted wires
- Lower terminal connection:
0.5 - 2.5 mm² for solid wire ends
1.5 - 2.5 mm² for stranded wire ends
Wire release function by twist and pull
- Strip length: 9 +1 mm
- Top Test openings
- Approvals: ÖVE Reg. Compliance with creepage distances and clearances (eg according to EN 60598) has to be ensured by the structural design of the luminaire.
- Sheet metall cutout is compatible to 46.415.1114-0

T 85				250V 400V	16 A	CAD
------	--	--	--	--------------	------	-----