

Part no. **35.235.**2001-0

OptiSpot Lens Ø 35 mm - Spot

Bayonet fixing by Twist & Lock action


Light distribution: Spot

OptiSpot Lens is optimized for use with connectors 47.360 with Ø 35 mm.*

Specification	
Top diameter	35 mm
Height	17,35 mm
Material holder	PC
Material lens	PMMA
Max. temperature	80°C
Weights	9,6 g
Pkg.	576 pcs

This product contains the following REACH SVHC substances. For further information please refer to www.bjb.com.

CAS-Number	EG-Number	Substance name
		2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-
3147-75-9	221-573-5	tetramethylbutyl)phenol

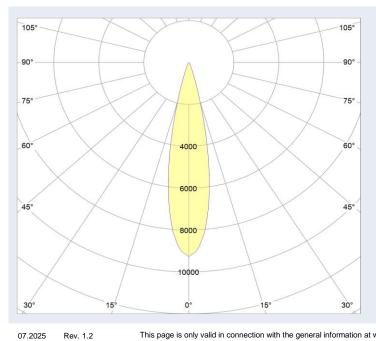

Rev. 1.2

Photometric data		
Beam angle (FWHM)*	21°	
Efficiency*	87%	
Measured with COB Type	Luminus CHM-6	
Measured with COB-holder	47.360.1020-0	

*Light distribution, beam angle and efficiency are dependent on the COB in use and its LES.