


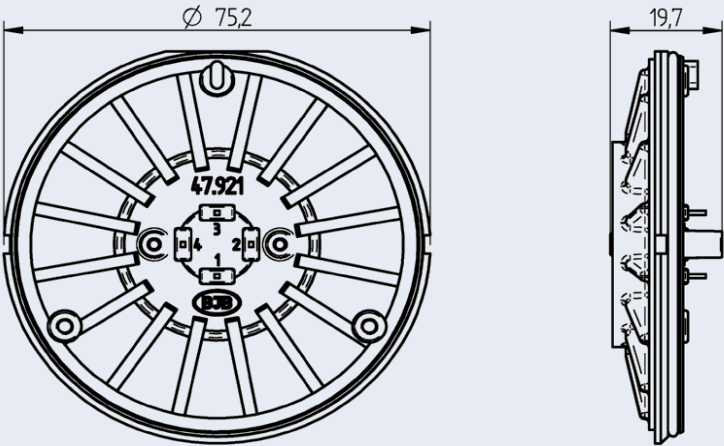

Part no.
47.921.U801-0

Base plate for mounting PCBs with integrated sensor or communication electronics

Top side of base plate:
The top side of the base plate is provided with an assembly coding, contact surfaces and soldering lugs for a PCB. (See drawing for details)

The PCB is positioned on the soldering lugs for soldering.

Protection class IP66 when used in combination with cover

For use with BJB receptacles 47.121.U301-0, 47.121.U303-0 and 47.121.U304-0

Specification	
Height	16.9 mm
Width	75.2 mm
Material	PBT
Colour	grey
Gasket material	Silicone
Contact material	Copper, nickel plated
Operating temperature	-40 °C ... +80 °C
IP protection class	IP66
Rated current	1.5 A
Rated voltage	30 VDC
VDE Certification	40049575
Weight	28.1 g
Packaging unit	50 pcs

Marking wire entry	Function
1	+24 V power supply
2	Negative pole for [DALI] protocol Ground for +24 V power supply (contact 1) Ground for General Digital I/O (contact 4)
3	Positive pole for [DALI] protocol
4	General Digital I/O (> 7 V)