


# OptiSpot Reflector Ø 74 mm - Wide Flood

35.850 · OptiSpot Reflector for use with COB connectors 47.360 / 47.319 with Ø 50 mm

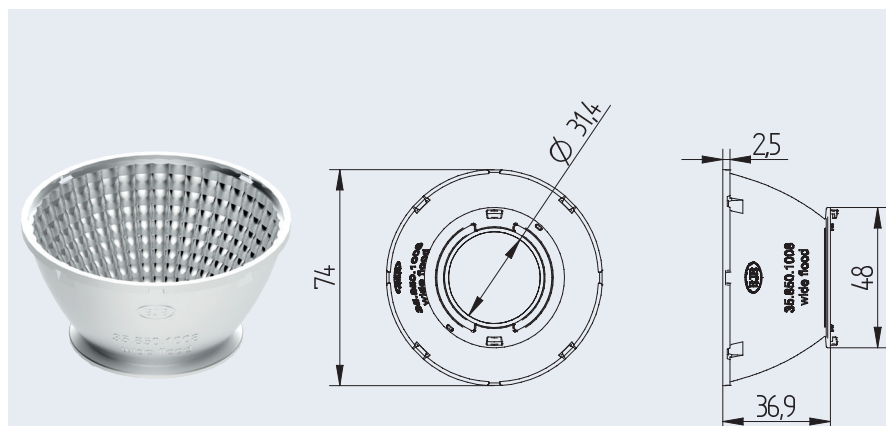

pkg.	wt.	part no.
25	19 g	<b>35.850.1008.50</b>

**OptiSpot Reflector Ø 74 mm - Wide Flood**

**Bayonet fixing by Twist & Lock action**

**Material: PC, Aluminium coated**

**Light distribution: Wide Flood**

Reflector is optimized for use with connectors **47.319.2013 / 2021 / 2025 / 2026 / 2345** and **47.360.5010.50** with Ø 50 mm.\*


- Reflector interface is adapted to the mixing cone of the connector
- Possibly visually disruptive openings of the connector are partly covered

Recommended for COB's with LES < 17 mm


Please do not touch the reflector inside with bare fingers.

\* The reflector can also be combined with other connectors. Please contact us for more information.

It should be noted that the upper cone diameter of the mixing chamber of the connector must be smaller than the opening diameter of the reflector (here Ø 31.4 mm), so that an undercut is avoided (picture on the right).

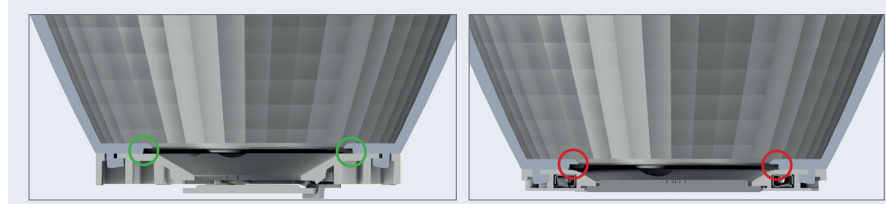

100°C CAD

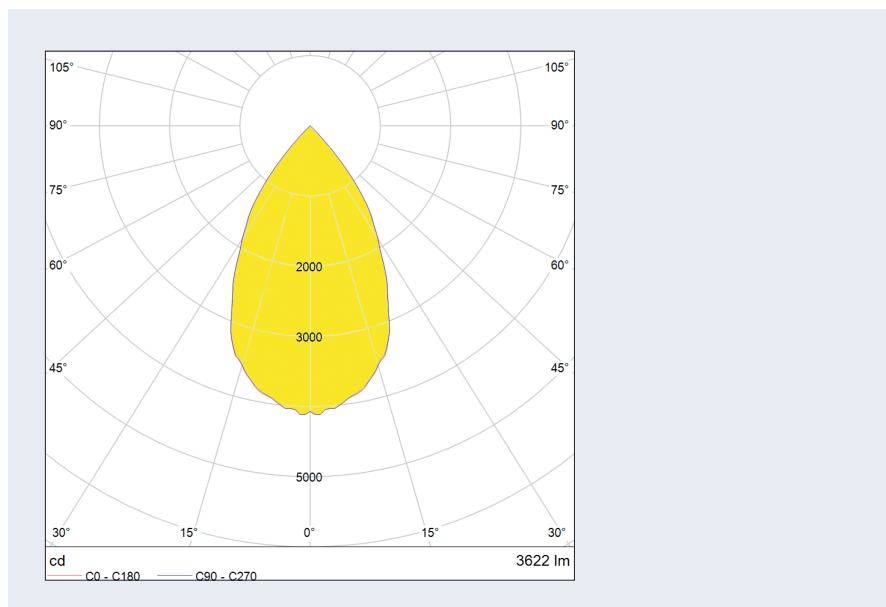

Beam angle (FWHM) measured with Citizen CLU038 and connector **47.319.2025.50**.

Beam angle (FWHM): 58°  
Efficiency: 89%

Beam angle depends on used COB and its LES.

# OptiSpot Reflector Ø 74 mm - Wide Flood

35.850 · 35.908 · 47.950 · Accessories and modular system



technology for light

## Accessories:



Effect on the beam angle and the efficiency of the reflector when combined with a cover plate, diffusor plate or diffusor lens (measured with COB Citizen CLU038 and COB connector 47.319.2025.50). The values are for reference only.

Beam angle (FWHM) reflector <b>35.850.1008.56</b>	Efficiency reflector <b>35.850.1008.56</b>	Beam angle with cover plate <b>35.908.1006.85</b> <span style="background-color: #FFD700;">NEW</span>	Efficiency with cover plate <b>35.908.1006.85</b> <span style="background-color: #FFD700;">NEW</span>
58°	89%	59°	82%
		Beam angle with diffusor plate <b>35.908.1006.89</b> <span style="background-color: #FFD700;">NEW</span>	Efficiency with diffusor plate <b>35.908.1006.89</b> <span style="background-color: #FFD700;">NEW</span>
		59°	82%
		Beam angle with diffusor lens <b>35.908.1003.89</b> <span style="background-color: #FFD700;">NEW</span>	Efficiency with diffusor lens <b>35.908.1003.89</b> <span style="background-color: #FFD700;">NEW</span>
		62°	87%
		Beam angle with diffusor plate <b>47.950.-401.85</b>	Efficiency with diffusor plate <b>47.950.-401.85</b>
		54°	82%
		Beam angle with diffusor plate <b>47.950.-402.85</b>	Efficiency with diffusor plate <b>47.950.-402.85</b>
		58°	83%
Beam angle with diffusor plate <b>47.950.-403.85</b>	Efficiency with diffusor plate <b>47.950.-403.85</b>		
59°	83%		
Beam angle with diffusor plate <b>47.950.-404.85</b>	Efficiency with diffusor plate <b>47.950.-404.85</b>		
54° / 54°	78%		

## Modular system

