


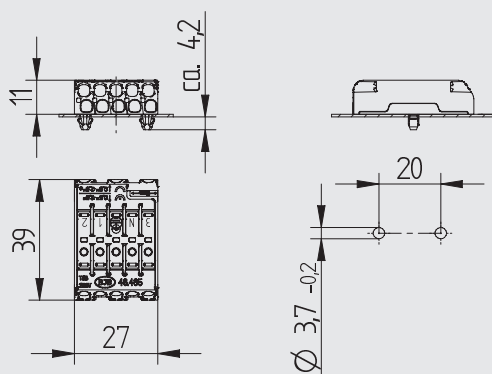

pkg. wt. part no.  
500 12 g 46.485.1111-0


**Flat terminal block**  
**5 pole**  
**Contact opening function**

Snap in pins  
Housing: PA, beige, PC, white  
Marking: 3 N ⊕ 1 2

- Upper terminal connection: 0.5 - 2.5 mm<sup>2</sup>  
Direct insertion of solid wire ends and finely stranded wire ends by using the contact opening function Contact opening function - also for release of already inserted wires
- Lower terminal connection:  
0.5 - 2.5 mm<sup>2</sup> for solid wire ends  
1.5 - 2.5 mm<sup>2</sup> for stranded wire ends  
Wire release function by twist and pull
- Strip length: 9 +1 mm
- Top Test openings
- Approvals: ÖVE Reg. Compliance with creepage distances and clearances (eg according to EN 60598) has to be ensured by the structural design of the luminaire.
- Sheet metall cutout is compatible to 46.415.1114-0

Minimum mounting distance

Metallfläche  
Metal surface

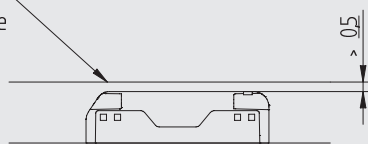

Compliance with creepage distances and clearances  
has to be ensured by the structural design of the luminaire.

|      |                                                                                     |                                                                                     |                                                                                     |              |      |     |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|------|-----|
| T 85 |  |  |  | 250V<br>400V | 16 A | CAD |
|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|------|-----|