

Alustrangressprofil mit M4 Gewindekanal

pkg.	wt.	part no.
500	12 g	46.485.4111.50


Flat terminal block
5 pole
Contact opening function

Snap in pins for use in extruded aluminum profiles with M4 profil groove
 Housing: PA, beige, PC, white
 Marking: 3 N ⊕ 1 2

- Upper terminal connection: 0.5 - 2.5 mm²
 Direct insertion of solid wire ends and finely stranded wire ends by using the contact opening function
 Contact opening function - also for release of already inserted wires
- Lower terminal connection:
 0.5 - 2.5 mm² for solid wire ends
 1.5 - 2.5 mm² for stranded wire ends
 Wire release function by twist and pull
- Strip length: 9 ±1 mm
- Top Test openings
- Approvals: ÖVE Reg. Compliance with creepage distances and clearances (eg according to EN 60598) has to be ensured by the structural design of the luminaire.
- Sheet metal cutout is compatible to 46.415.1114.50

Minimum mounting distance

Metallfläche
 Metal surface

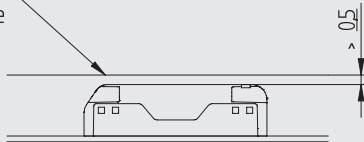

Compliance with creepage distances and clearances has to be ensured by the structural design of the luminaire.

T 85				250V 400V	16 A	CAD
	0.5 - 2.5 mm ²	1.5 - 2.5 mm ²	0.5 - 1.2 mm			